


Keor SPX UPS

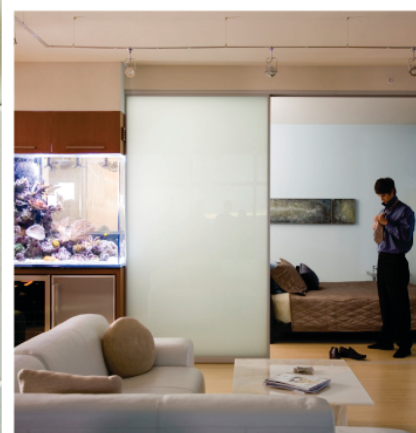

THE IDEAL SOLUTION FOR
ELECTRICAL NETWORK
DISTURBANCES

THE **GLOBAL SPECIALIST** IN ELECTRICAL AND DIGITAL
BUILDING INFRASTRUCTURES

 **legrand**

Keor SPX

Uninterruptible power supplies (UPS)




Single-phase UPS for computers and audio and video equipment
 Complete protection: discharge, overload, short-circuit, thermal protection
 Supply button / LED indicators: provides a visual and audible indication of the UPS status
 The UPS is protected against overload and short circuit by a fuse or resettable circuit breaker based on the model.
 Automatic start-up: when there is no mains supply or it is of poor quality, the UPS continues working using a battery and switches off if the network breaking time exceeds the back-up time

Pack	Cat. Nos	UPS - US standard (type B) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of multistandard outlets	Communication ports
1	310305	600	360	10 to 15	2	-
1	310306	800	480	10 to 15	2	-
1	310307	1000	600	10 to 15	4	USB
1	310308	1500	900	10 to 15	4	USB
1	310309	2000	1200	10 to 15	4	USB

NOTE: The stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Distributed by:

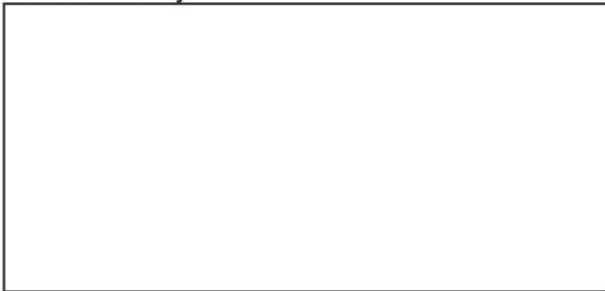

bticino

A Group Brand | legrand

BTICINO PHILIPPINES, INC.

G/F All Seasons Bldg., 112 Aguirre St.,
 Legaspi Village, Makati City,
 Philippines 1229

Tel.: (+632) 892 8972

Fax: (+632) 892 8971

www.bticino.com

Keor SPX

Uninterruptible power supplies (UPS)

Characteristics

General characteristics

Nominal power (VA)	600	800	1000	1500	2000
Active power (W)	360	480	600	900	1200
Technology	Line interactive VI				
Waveform	Pseudo-sinusoidal				

Input characteristics

Input voltage	230 V
Input frequency	50-60 Hz +/- 5Hz (autosense)
Input voltage range	162 V-290 V

Output characteristics

Output voltage	220 /230/240V
Output frequency (nominal)	50/60 Hz +/-1%

Communication and management

Screen and signalling	One button and 1 LED for real-time control	One button and 3 LEDs for real-time control
Remote control	Available	

Mechanical characteristics

Dimensions H x W x D (mm)	142x101x279	182x130x320			
Net weight (kg)	4,2	4,9	8,2	10,4	10,6

Ambient conditions

Ambient operating temperature (°C)	0 to 40°C
Relative humidity (%)	0 to 90%
Noise at 1 m (dB)	< 40

Multistandard outlets



Standard Input Plug